Assembly instructions for side cabinets





Important information for assembling our bathroom furniture.
Please read carefully before assembly and keep for future reference.

intarbad®

Assembly instructions for side cabinets

**Please check your bathroom furniture for possible damage before starting assembly.
We cannot accept complaints about damage to furniture parts already assembled!**



The product image is for illustration purposes only and may differ from the model ordered.

Safety instructions:

• Installation must only be carried out by qualified personnel.
• The mounting materials (screws, wall plugs) are only suitable for solid walls with sufficient load-bearing capacity.
• Before drilling, make sure there are no cables or pipes in the installation area of the wall.

Installation of side cabinets

• Depending on the model, remove the doors and/or drawers from the cabinet body. Handle them carefully and do not stand them on their edges (Figs. 1 + 2a).

• Determine the position of the cabinet on the wall and mark the mounting plates and drill holes. Separate the supplied mounting plates at the predetermined breaking points to obtain two plates (Fig. 6 – Scope of delivery). Fix the plates as close to the wall as possible (Fig. 3).

• Additional load support: Fix the mounting brackets (Figs. 16 + 17 + 18 – Scope of delivery) in the designated position. The brackets provide additional support and carry part of the load. This step is required only for variable side cabinets.

• Carefully hang the side cabinet in the designated anchorage, then align and secure it (Figs. 3 + 4). Make sure the round suspension screw engages correctly in the mounting plate (Fig. 3).

• Cover the adjusting screws/holes in the rear panel with the supplied cover caps (Fig. 7 – Scope of delivery).

• Insert the glass shelf supports into the designated holes and slide in the glass shelf (Fig. 8 – Scope of delivery).

• For highboards: insert the shelf supports into the designated holes and fit the shelf (Fig. 10 – Scope of delivery).

• For highboards: place the cosmetic insert in the drawer (Fig. 11 – Scope of delivery).

• Depending on the model, fit the doors and/or drawers (Figs. 1 + 2b) and align them (Figs. 5 + 6).


• Cover the hinge adjustment screws with the supplied cover caps (Figs. 9 + 12 – Scope of delivery).

• Fit the handles using the supplied screws (Fig. 14 – Scope of delivery).


• Attach the cover panel to the top of the cabinet with silicone or double-sided adhesive tape (not supplied) (Fig. 15 – Scope of delivery).

Assembly instructions for side cabinets

Fig. 1 | Removing / fitting door hinges

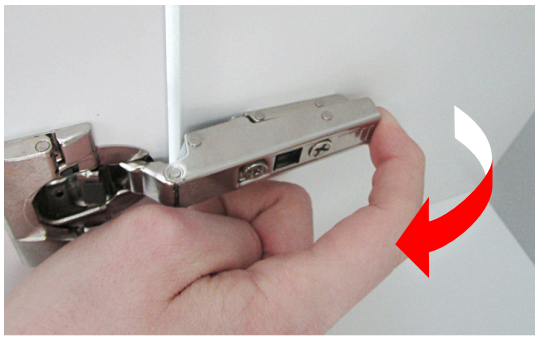

Removal

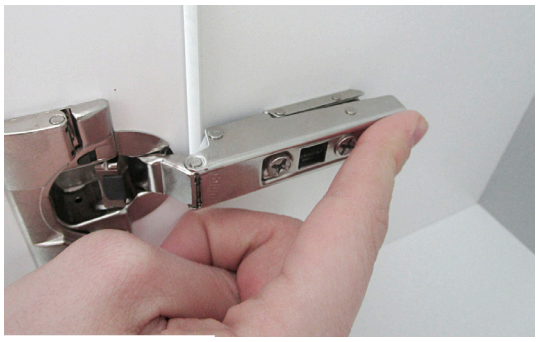

Fitting

Fig. 2a | Removing / fitting drawers



Pull the drawer forwards to open it.



Hold the drawer on both sides and lift it upwards firmly (it is only clipped in; this releases the click mechanism). Remove the drawer (see “Assembly videos” on our website).

Fig. 2b | Fitting the drawers



Pull out the cabinet runners and place the drawer onto them.




Push the drawer fully into the cabinet and press until you hear a “click” – it locks automatically.

Assembly instructions for side cabinets

Fig. 16+17+18 | Fitting mounting brackets for additional support

Note: This assembly step is required only for variable side cabinets.

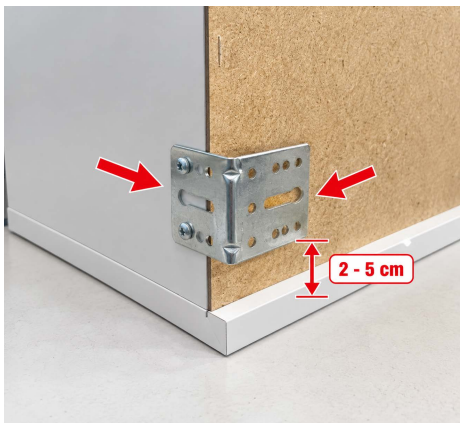





1. Mount the cabinet on the wall using the cabinet hangers and align it.
2. Hold the bracket against the cabinet and wall and mark its position.
3. Remove the cabinet from the wall again.
4. Hold the bracket at the marked position and mark the drill hole.
5. Drill the hole at the marked position.
6. Fix the bracket to the wall with a suitable screw.
7. Mount the cabinet on the wall again and align it.
8. Screw the bracket to the cabinet.

Assembly instructions for side cabinets

Fig. 3 | Cabinet hanger with mounting plate



left right

Assembly instructions for side cabinets

Fig. 4 | Adjusting cabinet hangers




Height adjustment

Turn left – down

Turn right – up




Depth adjustment

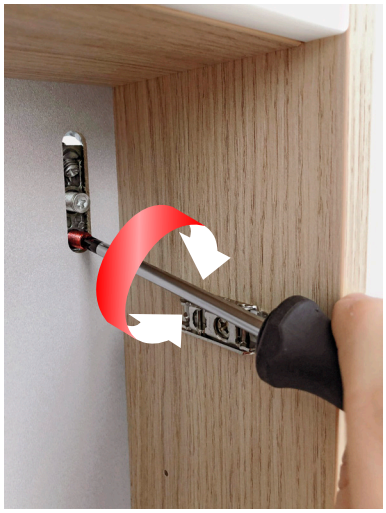


Fixing to the mounting plate


Fig. 5 | Adjusting door hinges

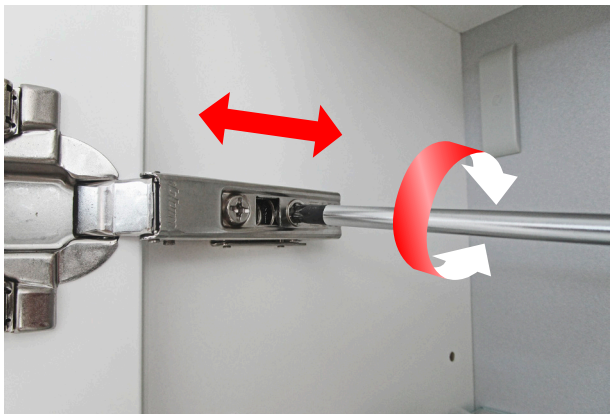

Depth adjustment

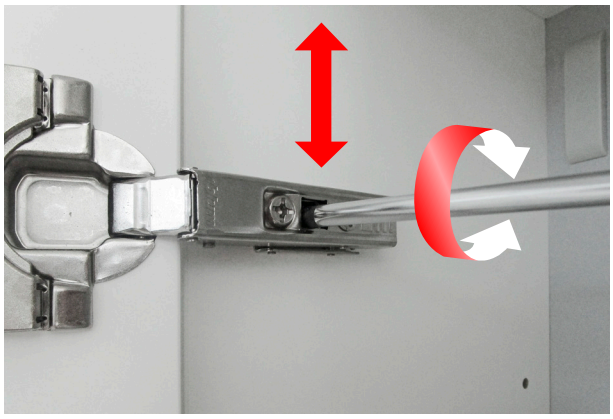

Height adjustment

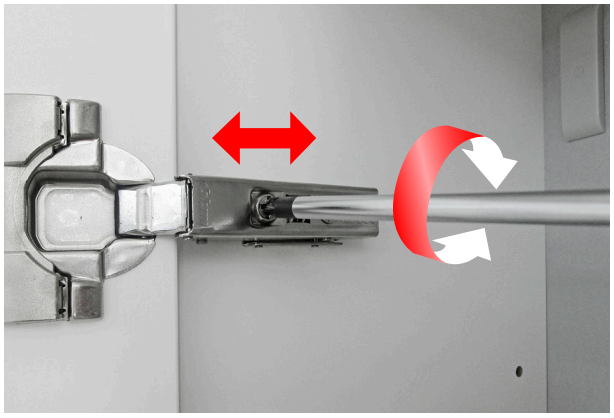


Right / left adjustment

Assembly instructions for side cabinets

Fig. 6 | Height adjustment of drawers



3a. Loosen the upper screw slightly so that the front can be adjusted.

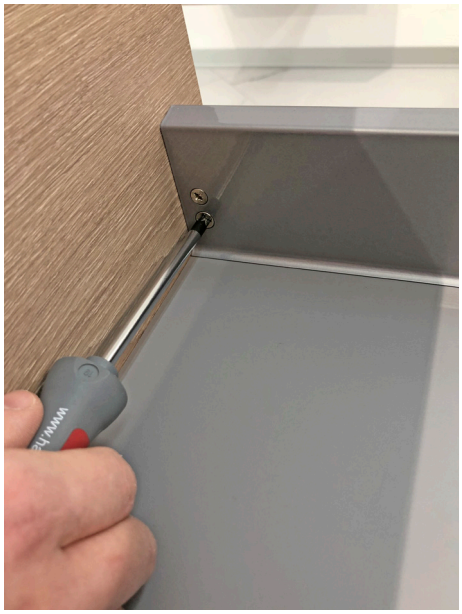


3b. Adjust the height using the lower screw.



3c. Repeat on both sides of the drawer frame. Then tighten the upper screw again and cover the adjusting screws with the supplied cover caps (Fig. 12 – Scope of delivery).

Assembly instructions for side cabinets

Scope of delivery / assembly accessories

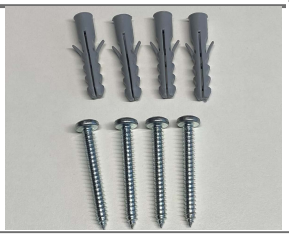	Fig. 5 2 hinges per door		Fig. 10 Highboard only: 4 shelf supports per shelf
	Fig. 6 Mounting plates (separate from each other) 8 mm screws 8 mm wall plugs		Fig. 11 Highboard only: 1 cosmetic insert
	Fig. 7 1 cover cap per cabinet hanger		Fig. 12 Cover caps for adjusting screws (2 per drawer)
	Fig. 8 4 glass shelf supports per glass shelf 2 glass shelves per compartment		4 2·4 crews per handle, nding on the model
	Fig. 9 1 cover cap per door for the hinge without soft-close damper		Fig. 15 1 cover panel per cabinet
	Fig. 16 2 brackets per cabinet		Fig. 17 4 screws and 4 wall plugs per cabinet for fixing the brackets to the wall
	Fig. 18 4 screws per cabinet for fixing the brackets to the cabinet		