DESIGNBÄDER.COM

QUALITÄT MADE IN GERMANY | BADMÖBEL DIREKT VOM HERSTELLER

Assembly instructions BELLA

Important information for assembling our bathroom furniture.
Please read carefully before assembly and keep for future reference.

intarbad®

Assembly instructions BELLA

Please check your bathroom furniture for possible damage before starting assembly. We cannot accept complaints about damage to furniture parts that have already been assembled!

The product image is for illustration purposes only and may differ from the model ordered.

Safety instructions:

- Installation must only be carried out by qualified personnel.
- The fastening materials (screws, dowels) are only designed for solid walls with sufficient load-bearing capacity.
- Before drilling, make sure that there are no cables or pipes in the installation area of the wall.
- Electrical installations may only be carried out by a qualified electrician.
- Mirror cabinets/lighted mirrors with electrical installations must be at least 60 cm away from the bathtub or shower.

Installation sequence

❶ Mirror cabinet / illuminated mirror

❷ WT base cabinet

❸ Washbasin

Assembly instructions for mirror cabinets

Important information for assembling our bathroom furniture. Please read carefully and keep for future reference before assembly.

The product image is for illustration purposes only and may differ from the model ordered.

Assembly of mirror cabinets

- Remove the glass door hinges from the cabinet **(Fig. 1 – Removal)**.
- Fit the glass door hinges to the mirror doors (click the hinge into the adhesive plate and open it) **(Fig. 1a + 1b – Installation/opening)**.
- Please note: For the 20 cm mirror door, one hinge with a spring **(Fig. 6 – Scope of delivery)** and one hinge without a spring **(Fig. 5 – Scope of delivery)** are installed.
- Determine the position of the cabinet on the wall and mark the position of the mounting plates and drill holes. Separate the enclosed mounting plates from each other (predetermined breaking points) so that you have 2 plates.
  Have! **(Fig. 7 – Scope of delivery)** Attach the mounting plates as close to the wall as possible.
- Mount the LED surface-mounted light on top of the mirror cabinet using the screws provided.
- Connect the LED surface-mounted light to the transformer. Electrical installation must only be carried out by a qualified electrician.
- Carefully place the mirror cabinet into the designated anchorage, then align and secure it **(Fig. 2a + 2b)**. Make absolutely sure that the round hanging screw is correctly inserted into the mounting plate **(Fig. 2a)**.
- Cover the adjusting screws/holes in the rear panel with the cover caps provided. **(Fig. 8 – Scope of delivery)**.
- Insert the glass shelf supports into the designated holes and slide in the glass shelf **(Fig. 9 – Scope of delivery)**.

Assembly instructions for mirror cabinets

Assembly of mirror cabinets

- Select the position of the magnetic strip and stick it on **(Fig. 10 – Scope of delivery)**.
- Assemble and align the mirror doors **(Fig. 1 – Assembly; Fig. 3 – Alignment)**.
- Attach door dampers to the upper hinges **(Fig. 4 – assembly; Fig. 11 – scope of delivery)**.
- Cover the adjustment screws in the hinge with the cover caps provided **(Fig. 12 – included in delivery)**.
- Stick the mirror door handles onto the mirror door at a distance of approx. 1 mm from the edge **(Fig. 13 – Scope of delivery)**.

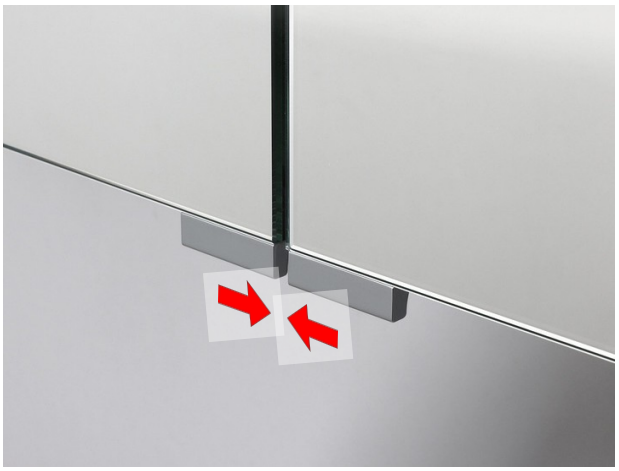

- Select the position for the magnifying mirror and stick it on. We recommend the inside of a mirror door **(Fig. 14 – included in delivery)**. Please ensure that the magnifying mirror is not attached at the same height of the glass shelf.

Assembly instructions for mirror cabinets

Fig. 1 | Disassembly and assembly of glass door hinges

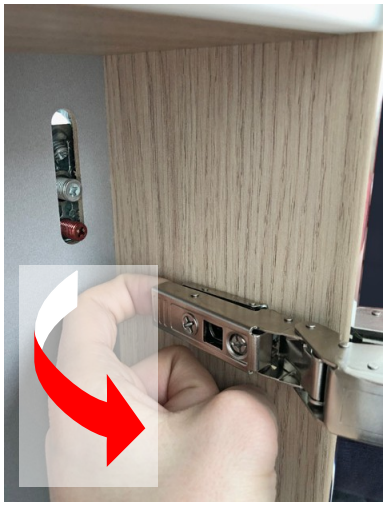

Fig. 1a | Disassembly

Fig. 1b | Assembly / opening

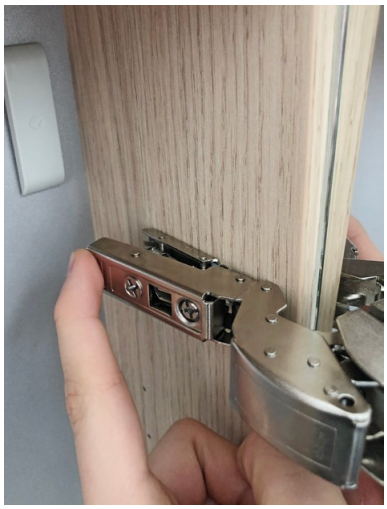

Fig. 1c | Assembly of mirror door

Fig. 2 | Cabinet hanger Mirror cabinet

Assembly instructions for mirror cabinets

Fig. 2a | Cabinet hanger with mounting rail

left

right

Fig. 2b | Adjusting cabinet hangers

Height adjustment Turn left – down Turn right – up

Depth adjustment

Fixing to the mounting plate

Assembly instructions for mirror cabinets

Fig. 3 | Adjusting hinges

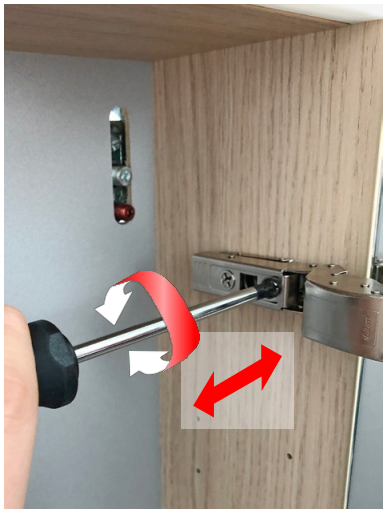

Right/left adjustment

Height adjustment

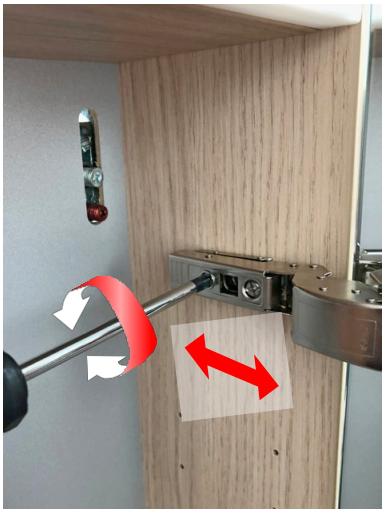

Depth adjustment

Fig. 4 | Fitting glass door dampers and cover caps

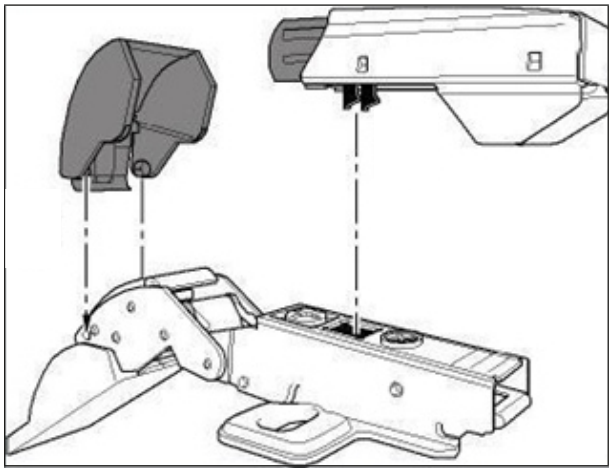

Assembly instructions for mirror cabinets

Scope of delivery / assembly accessories

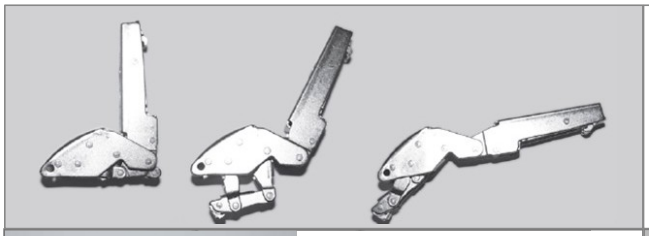

Fig. 5
Per 20 cm mirror door 1 hinge without spring

Fig. 6
Per mirror door 2 hinges with spring

Fig. 7
Mounting plates (separate from each other

Fig. 12
One cover cap for the hinge without door damper per door

)
Screws 8 mm
8 mm dowels

Fig. 8
Per cabinet hanger 1 cover cap

Fig. 13
1 handle per door

Fig. 14
Per mirror cabinet
1 magnifying mirror (optional)

Fig. 9
Per glass shelf
6 glass shelf supports Per compartment 2 glass shelves

Fig. 10
Per mirror cabinet 1 magnetic strip **(can be cut to size)**

Fig. 11
1 door damper per door (grey cover cap + grey attachment piece)

Assembly instructions for illuminated mirror

Important information for installing our bathroom furniture. Please read carefully before installation and keep for future reference.

Assembly of light mirrors

- Determine the position of the light mirror on the wall, mark the drilling points, drill, insert the dowels and screw in the screw hooks **(Fig. 15 – included in delivery)**.
- Please note: Electrical work may ONLY be carried out by a qualified electrician.
- The height can only be adjusted on the back of the mirror. To do this, the light mirror must be removed from the wall. Adjustment is made by turning the screw in the cabinet hanger.
- When installing the light mirror, ensure that the motion sensor is mounted at a minimum distance of 15 cm from fittings, brackets, etc.

Scope of delivery / mounting accessories light mirror



Fig. 15
2 mounting hooks
2 dowels 8 mm

Assembly instructions for vanity units

Important information for assembling our bathroom furniture. Please read carefully before assembly and keep for future reference.

The product image is for illustration purposes only and may differ from the model you have ordered.

Assembly of vanity units

- Remove/unhook the pull-outs from the body **(Fig. 1)**.
- Determine the position of the vanity unit on the wall and mark the position of the mounting plates and drill holes. Attach the mounting plates as close to the wall as possible **(Fig. 5 and Fig. 6 – Scope of delivery)**.
- Remove the cover caps from the cabinet hangers on both sides **(Fig. 7 – included in delivery)**.
- Carefully place the WT base cabinet on the mounting plates and then adjust the height and depth **(Fig. 5)**.
- Cover the cabinet hangers with the cover caps provided **(Fig. 7 – included in delivery)**.
- Fit the handles/handle strip using the screws supplied **(Fig. 8 – included in delivery)**.
- Handle the washbasin with care and do not stand on the edges. Carefully place the washbasin on the base cabinet.
- Have the water connections installed by a qualified professional.
- Seal the washbasin to the wall and all areas where water can penetrate with silicone (transparent and solvent-free – not included in delivery) **(Fig. 6)**.
- Fit/hang the pull-outs and align them if necessary **(Fig. 2 / Fig. 3)**.
- On models with a push-to-open function, the front gap setting and the ejection force can be adjusted **(Fig. 4)**.

Assembly instructions for vanity units

Fig. 1 | Dismantling the pull-outs

Pull the pull-out unit of the vanity unit forwards – open

Hold the pull-out unit on both sides and lift it upwards with a swing (the pull-out unit is only clicked into place, so you are releasing the click mechanism). Remove the pull-out unit (see video on our online page "Assembly videos").

Fig. 2 | Installing the pull-outs

Pull out the cabinet rails and attach the pull-out.

Push the pull-out unit all the way into the WT base cabinet and press down until you hear a
"click" is heard – it locks automatically.

Assembly instructions for vanity units

Fig. 3 | Height adjustment of pull-outs

3a. Loosen the top screw slightly so that the front can be adjusted.

3b. Adjust the height using the lower screw.

3c. Do this on both sides of the drawer frame. Then tighten the top screw again and cover the adjustment screws with the cover caps provided **(Fig. 12 Scope of delivery)**.

Assembly instructions for vanity units

Fig. 4 | Front gap adjustment for models with push-to-open function

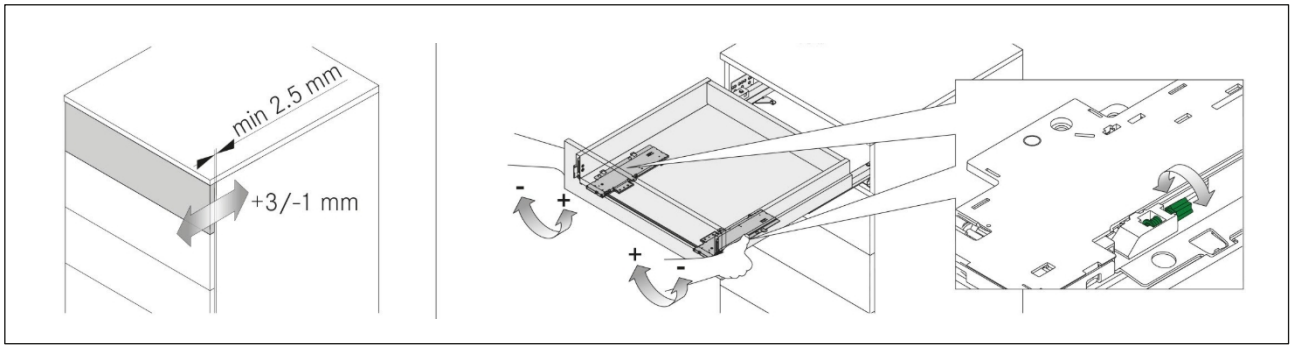

Ejection force for models with push-to-open function

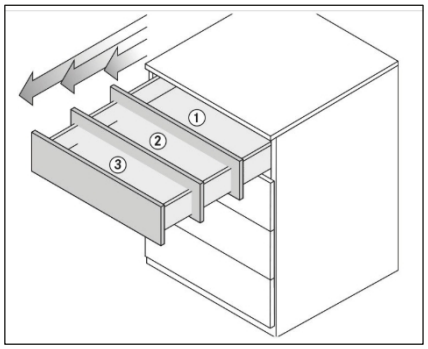

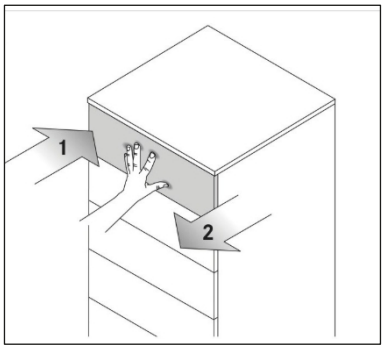

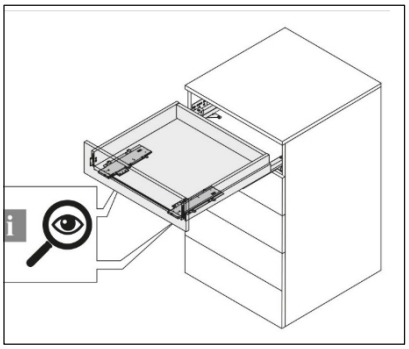

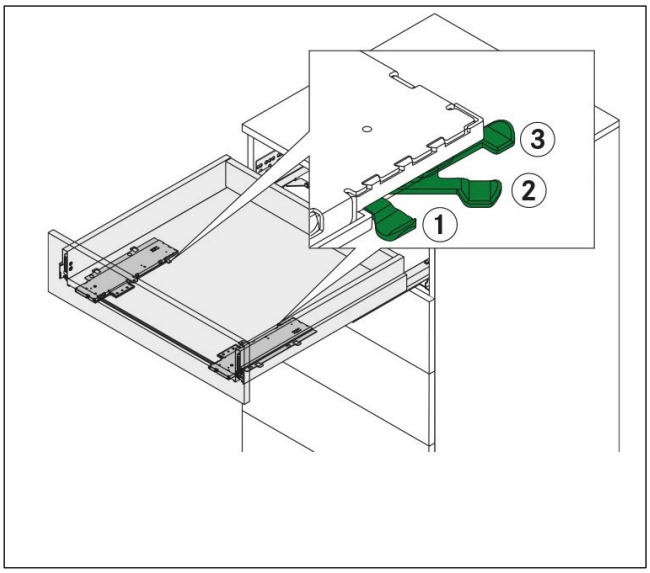

1. Light | 2. Medium | 3. Heavy

Assembly instructions for vanity units

Fig. 5 | Installation and adjustment of cabinet hangers WT base cabinet

Assembly

Depth adjustment

Height adjustment

Fig. 6 | Washbasin installation / Sealing to the wall with silicone

Assembly instructions for vanity units

Scope of delivery / Assembly accessories

	Fig. 6 Mounting plate Screws 8 mm 8 mm dowels		**Fig. 7** Per cabinet hanger 1 cover cap
	Fig. 8 Per handle, depending on handle model 2-4 screws		**Fig. 12** Cover cap for adjusting screws (2 pieces per pull-out)