Assembly instructions
BELLA.MINI

Important information for assembling our bathroom furniture.
Please read carefully before assembly and keep for future reference.

intarbad®

Assembly instructions BELLA.MINI

Please check your bathroom furniture for possible damage before starting assembly. We cannot accept complaints about damage to furniture parts that have already been assembled!

The product image is for illustration purposes only and may differ from the model ordered.

Safety instructions:

- Assembly may only be carried out by qualified persons.
- The mounting hardware (screws, dowels) is only designed for solid walls with sufficient load-bearing capacity.
- Before drilling, make sure that there are no cables or pipes in the installation area of the wall.
- Electrical installations may only be carried out by a qualified electrician.
- Mirror cabinets/lighted mirrors with electrical installations must be at least 60 cm away from the bathtub or shower.

Installation sequence

❶ Light mirror

❷ WT base cabinet

❸ Washbasin

Light mirror installation instructions

Important information for installing our bathroom furniture. Please read carefully and keep for future reference before installation.

The product image is for illustration purposes only and may differ from the model you have ordered.

Assembly of illuminated mirrors

- Determine the position of the light mirror on the wall, mark the drilling points, drill, insert the dowels and screw in the screw hooks **(Fig. 15 – included in delivery)**.
- Please note: Electrical work may ONLY be carried out by a qualified electrician.
- The height can only be adjusted on the back of the mirror. To do this, the light mirror must be removed from the wall. Adjustment is made by turning the screw in the cabinet hanger.

Scope of delivery / mounting accessories Light mirror

Fig. 15
2 mounting hooks
2 dowels 8 mm

Assembly instructions for vanity units

Important information for assembling our bathroom furniture. Please read carefully before assembly and keep for future reference.

The product image is for illustration purposes only and may differ from the model you have ordered.

Assembly of vanity units

- Depending on the model, remove the door or pull-out from the body, handle with care and do not stand on the edges **(Figs. 1 + 2)**.
- Determine the position of the vanity unit on the wall and mark the position of the mounting plates and drill holes. Attach the mounting plates as close to the wall as possible **(Fig. 5 and Fig. 9 – Scope of delivery)**.
- Remove the cover cap from the cabinet hanger on both sides **(Fig. 10 – scope of delivery)**.
- Carefully place the WT base cabinet on the mounting plates and then adjust the height and depth **(Fig. 5)**.
- Cover the cabinet hangers with the existing cover caps **(Fig. 10 – included in delivery)**.
- Fit the handles/handle strip using the screws supplied **(Fig. 11 – included in delivery)**.
- Handle the washbasin with care and do not stand on the edges. Carefully place the washbasin on the base cabinet.
- Have water connections installed by a qualified professional.
- Seal the washbasin to the wall and all areas where water could penetrate (especially around the washbasin) with silicone (transparent and solvent-free – not included in delivery) **(Fig. 6)**.
- Fit the door or pull-out **(Fig. 1 or 2)** and align if necessary **(Fig. 3 or 4)**.
- Cover the adjustment screws in the hinge (pull-out) with the cover caps provided **(Fig. 12 or 13)**.

Assembly instructions for vanity units

Fig. 1 | Disassembly/assembly of door hinges

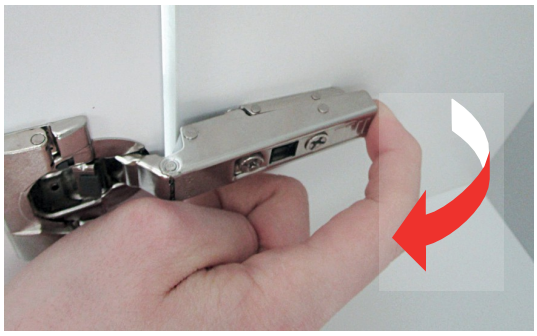

Removal

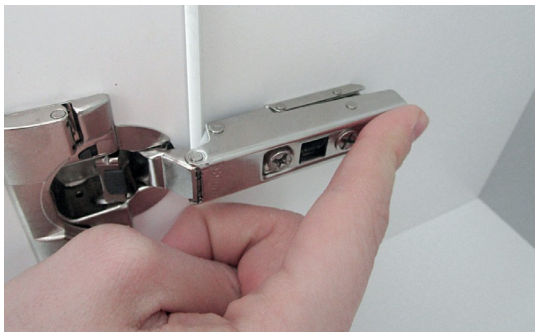

Installation

Fig. 2 | Removal/installation of pull-outs

Pull the base cabinet pull-out forward to open it.

Hold the pull-out unit on the sides and lift it upwards with momentum (the pull-out unit is only clicked into place, so you are releasing the click mechanism
mechanism). Remove the pull-out (see video on our online page "Assembly videos").

Pull out the cabinet rails and attach the pull-out.

Push the pull-out unit all the way into the washbasin base cabinet and press down until you hear a "click" – it locks automatically.

Assembly instructions for vanity units

Fig. 3 | Aligning doors

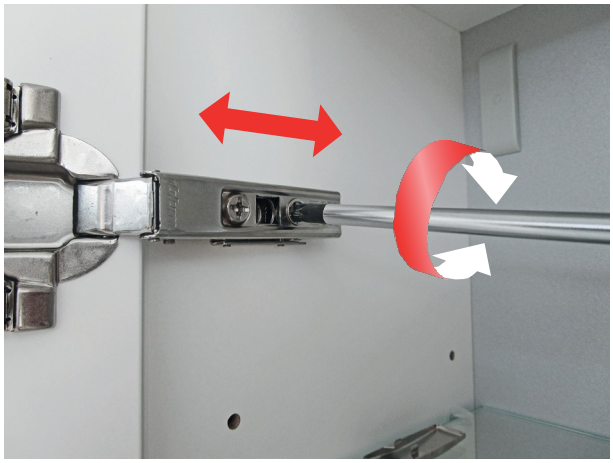

Depth adjustment

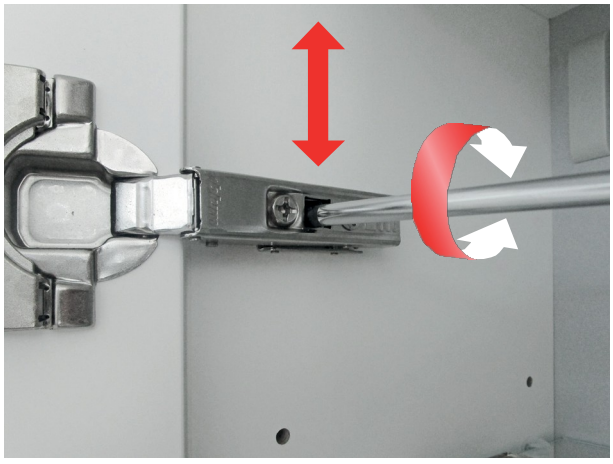

Height adjustment

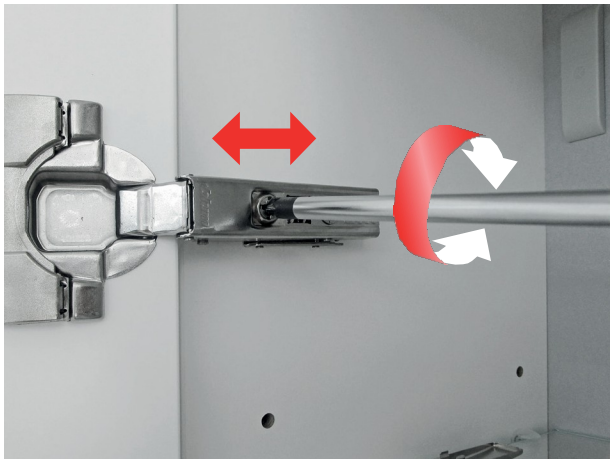

Right/left adjustment

Assembly instructions for vanity units

Fig. 4 | Height adjustment of pull-outs

4a. Loosen the top screw slightly so that the front can be adjusted.

4b. Adjust the height using the lower screw.

4c. Do this on both sides of the drawer frame. Then tighten the upper screw again and cover the adjusting screws with the cover caps provided **(Fig. 12 Scope of delivery)**.

Assembly instructions for vanity units

Fig. 5 | Assembly and adjustment of the cabinet hangers WT base cabinet

Assembly

Depth adjustment

Height adjustment

Fig. 6 | Washbasin assembly / Sealing to the wall with silicone

Assembly instructions for vanity units

Scope of delivery / Assembly accessories

	**Fig. 9** Mounting plate Screws 8 mm 8 mm dowels		**Fig. 10** 1 cover plate per cabinet hanger
	Fig. 11 Per handle, depending on handle model 2-4 screws		**Fig. 12** Cover caps for adjusting screws in the drawer (2 per pull-out)
	Fig. 13 2 cover caps per door		