DESIGNBÄDER.COM

QUALITÄT MADE IN GERMANY | BADMÖBEL DIREKT VOM HERSTELLER

Assembly instructions MONZA

Important information for assembling our bathroom furniture.
Please read carefully before assembly and keep for future reference.

intarbad®

Assembly instructions MONZA

Please check your bathroom furniture for possible damage before starting assembly. We cannot accept complaints about damage to furniture parts that have already been assembled!

The product image is for illustration purposes only and may differ from the model ordered.

Safety instructions:

- Installation must only be carried out by qualified personnel.
- The mounting materials (screws, dowels) are only designed for solid walls with sufficient load-bearing capacity.
- Before drilling, make sure that there are no cables or pipes in the installation area of the wall.
- Electrical installations may only be carried out by a qualified electrician.
- Mirror cabinets/lighted mirrors with electrical installations must be at least 60 cm away from the bathtub or shower.

Installation sequence

❶ Mirror cabinet / illuminated mirror

❷ WT base cabinet

❸ Washbasin

❹ Side cabinet

Assembly instructions for illuminated mirror

Important information for installing our bathroom furniture. Please read carefully and keep for future reference before installation.

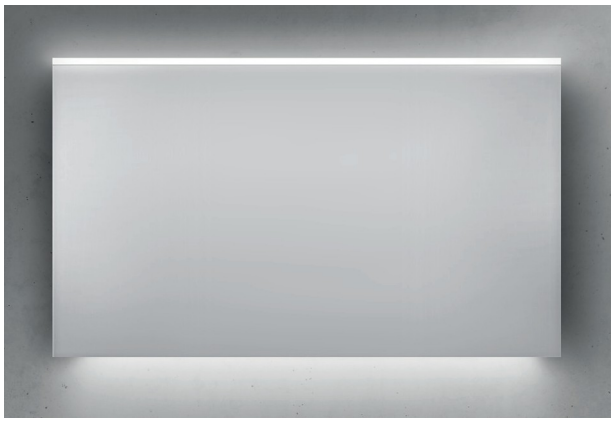

The product image is for illustration purposes only and may differ from the model you have ordered.

Assembly of illuminated mirrors

- Determine the position of the light mirror on the wall, mark the drilling points, drill, insert the dowels and screw in the screw hooks **(Fig. 15 – included in delivery)**.
- Please note: Electrical work may ONLY be carried out by a qualified electrician.
- The height can only be adjusted on the back of the mirror. To do this, the light mirror must be removed from the wall. Adjustment is made by turning the screw in the cabinet hanger.
- When installing the light mirror, ensure that the motion sensor is mounted at a minimum distance of 15 cm from fittings, brackets, etc.

Scope of delivery / Mounting accessories Light mirror

Fig. 15
2 mounting hooks
2 dowels 8 mm

Assembly instructions for vanity units

Important information for assembling our bathroom furniture. Please read carefully before assembly and keep for future reference.

The product image is for illustration purposes only and may differ from the model ordered.

Assembly of vanity units

- Remove/unhook the pull-out from the body **(Fig. 1)**.
- Determine the position of the vanity unit on the wall and mark the position of the mounting plates and drill holes. Attach the mounting plates as close to the wall as possible **(Fig. 4 and Fig. 6 – Scope of delivery)**.
- Remove the cover caps from the cabinet hangers on both sides **(Fig. 7 – included in delivery)**.
- Carefully place the WT base cabinet on the mounting plates and then adjust the height and depth **(Fig. 4)**.
- Cover the cabinet hangers with the cover caps provided **(Fig. 7 – included in delivery)**.
- Screw the additional mounting brackets (for base cabinets 120 cm wide or more) to the wall **(Fig. 5)**.
- Handle the washbasin with care and do not place it on its edges. Carefully place the washbasin on the base

  cabinet
  cabinet.
- Have the water connections installed by a qualified professional.
- Seal the washbasin to the wall and all areas where water could penetrate with silicone (transparent and solvent-free – not included in delivery) **(Fig. 6)**.
- Fit/hang the pull-out unit and adjust if necessary **(Fig. 2 / Fig. 3)**.

Assembly instructions for vanity units

Fig. 1 | Dismantling the pull-outs

Pull out the base cabinet
Pull out the front – open

Hold the pull-out unit on both sides and lift it upwards with a swift movement (the pull-out unit is only clicked into place, so this will release the click mechanism). Remove the pull-out unit (see video on our online page "Assembly videos").

Fig. 2 | Installing the pull-outs

Pull out the cabinet rails and attach the pull-out.

Push the pull-out unit all the way into the WT base cabinet and press down until you hear a
"click" is heard – it locks automatically.

Assembly instructions for vanity units

Fig. 3 | Height adjustment of pull-outs

3a. Loosen the top screw slightly so that the front can be adjusted.

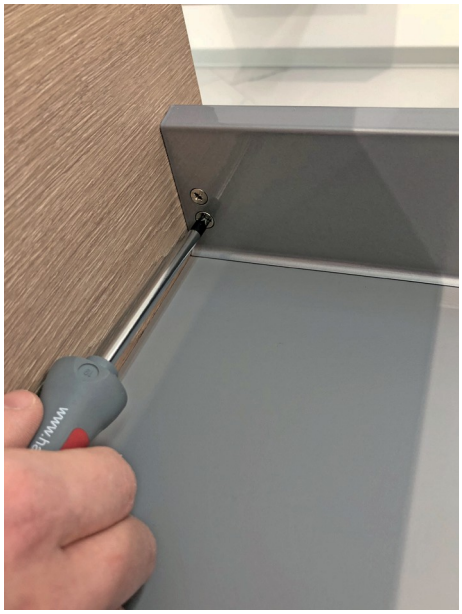

3b. Adjust the height using the lower screw.

3c. Do this on both sides of the drawer frame. Then tighten the top screw again and cover the adjusting screws with the cover caps provided **(Fig. 12 Scope of delivery)**.

Assembly instructions for vanity units

Fig. 4 | Assembly and adjustment of the cabinet hangers WT base cabinet

Assembly

Depth adjustment

Height adjustment

Fig. 5 | Mounting bracket Screw on

Fig. 6 | Washbasin mounting / Sealing to the wall with silicone

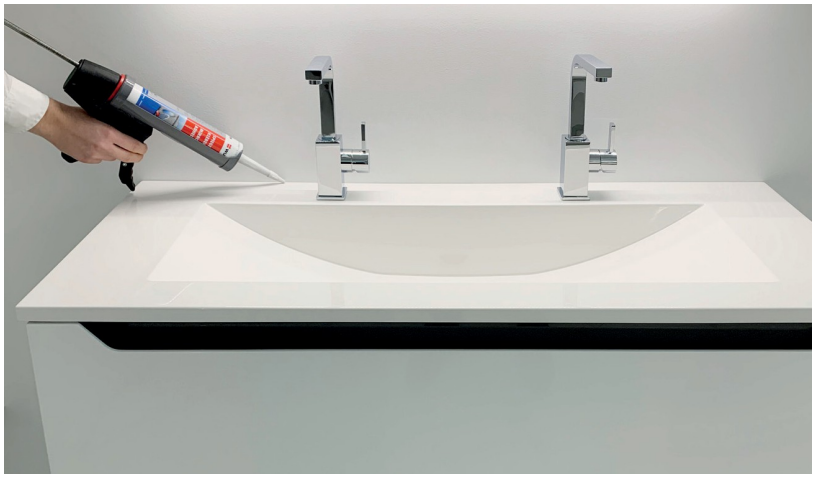

Assembly instructions for vanity units

Scope of delivery / Installation accessories

	Fig. 6 Mounting plate Screws 8 mm 8 mm dowels		**Fig. 7** Per cabinet hanger 1 cover cap
	Fig. 8 Per handle, depending on handle model 2-4 screws		**Fig. 12** Cover cap for adjusting screws (2 per pull-out)

Assembly instructions for side cabinets

Important information for assembling our bathroom furniture. Please read carefully before assembly and keep for future reference.

The product image is for illustration purposes only and may differ from the model you have ordered.

Assembly of wall cabinets

- Remove the door(s) from the cabinet, handle with care and do not stand them on their edges **(Fig. 1)**.
- Determine the position of the cabinet on the wall and mark the position of the mounting plates and drill holes. Separate the enclosed mounting plates from each other
  (predetermined breaking points) so that you have 2 plates
  ! **(Fig. 6 – Scope of delivery)** Attach the mounting plates as close to the wall as possible **(Fig. 2)**.
- Carefully place the side cabinet into the designated anchorage and then align and secure **(Figs. 2 + 3)**. It is essential to ensure that the round suspension screw is correctly hooked into the mounting plate **(Fig. 2)**.
- Cover the adjusting screws/holes in the rear panel with the cover caps provided **(Fig. 7 – included in delivery)**.
- Insert the glass shelf supports into the holes provided and slide in the glass shelf **(Fig. 8 – included in delivery)**.
- Fit and align the door(s) **(Fig. 1, Fig. 4)**.
- Cover the adjustment screws in the hinge with the cover caps provided **(Fig. 9 – included in delivery)**.

Assembly instructions for side cabinets

Fig. 1 | Assembly/disassembly of hinges

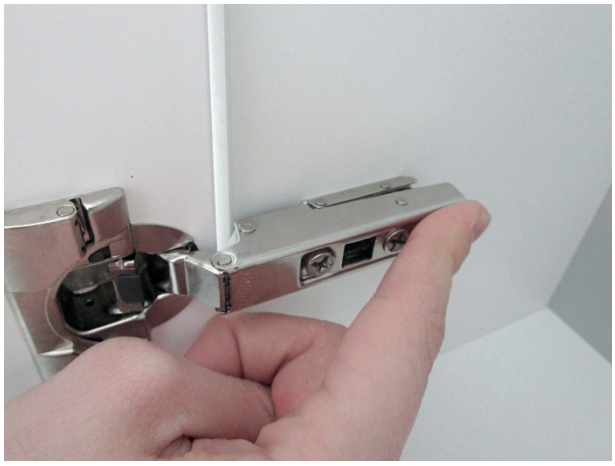

Assembly

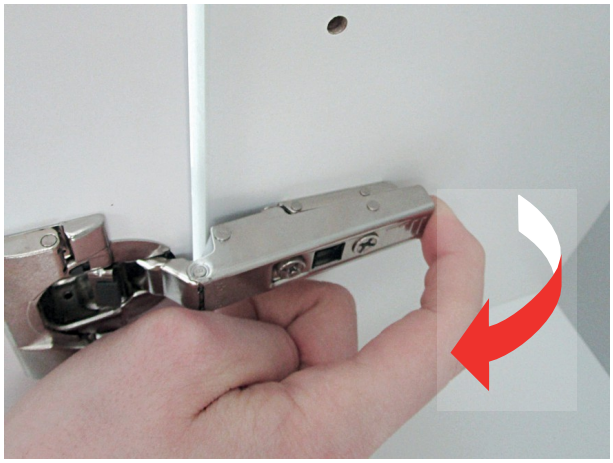

Disassembly

Fig. 2 | Cabinet hanger Side cabinet

Left

Right

Assembly instructions for side cabinets

Fig. 3 | Adjusting cabinet hangers

Height adjustment Turn left – down Turn right – up

Depth adjustment

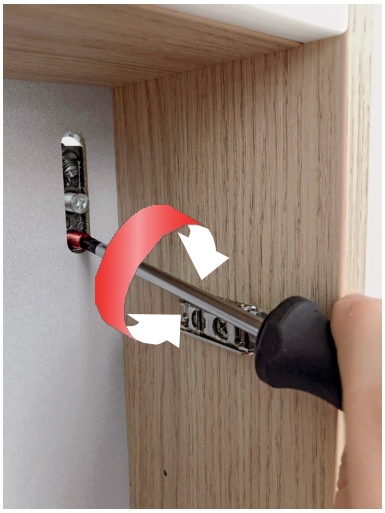

Fixing to the mounting plate

Fig. 4 | Aligning doors

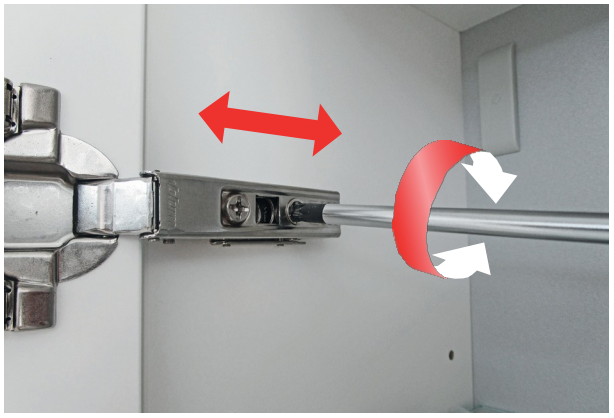

Depth adjustment

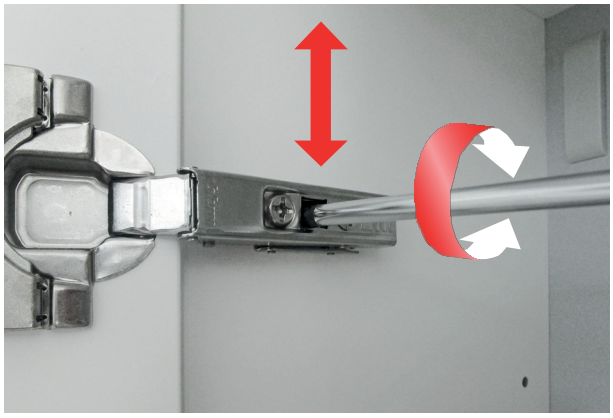

Height adjustment

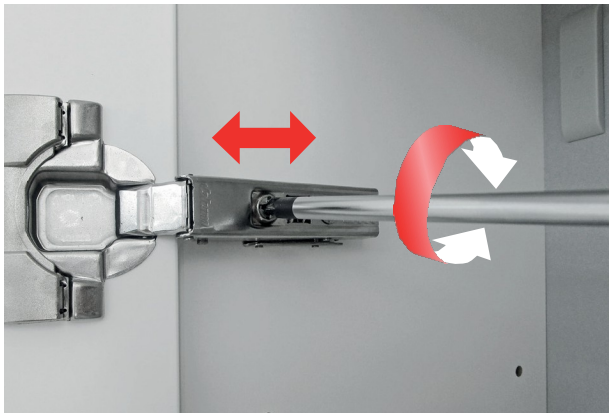

Right/left adjustment

Assembly instructions for side cabinets

Scope of delivery / assembly accessories

	Fig. 5 2 hinges per door		**Fig. 8** Per glass shelf 4 glass shelf supports 2 glass shelves per compartment
	Fig. 6 Mounting plates (separate from each other) Screws 8 mm 8 mm dowels		**Fig. 9** 1 cover cap per door for the hinge without door damper
	Fig. 7 Per cabinet hanger 1 cover cap		